LINEAR MOTION VIBRATING SCREENS

The model DS vibrating screens from General Kinematics provide a simple, cost-effective solution for your screening needs. With a dual motor drive and simple construction, our standard units have few moving parts, which adds up to a cost-effective operation and lower maintenance costs. The wide range of available screen sizes can be set at various angles and fitted with a variety of screen adjustments to meet your process requirements.

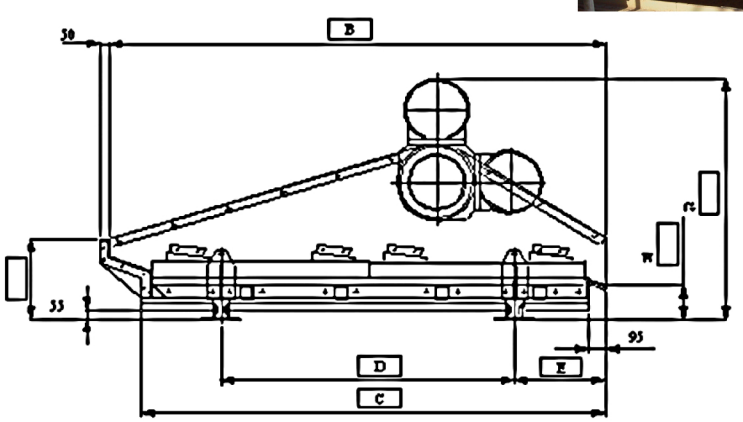

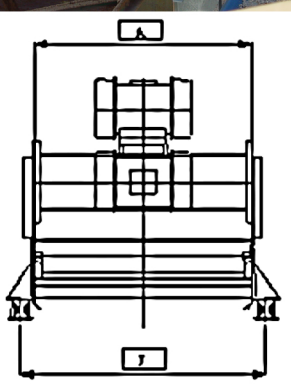

Linear Motion Vibrating Screen Models

MODEL	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	MOTOR kW	M/C MASS kg
DS 124	610	1275	1000	900	230	445	1140	190	865	2 x 0.6	360
DS 126	**610**	**1885**	**1680**	**1200**	**230**	**445**	**1140**	**190**	**865**	**2 x 0.85**	**420**
DS 136	915	2180	1995	1040	505	430	1255	195	1075	2 x 1.2	710
DS 138	**915**	**2790**	**2605**	**1650**	**505**	**430**	**1255**	**195**	**1075**	**2 x 1.2**	**810**
DS 146	1220	2180	1995	1040	505	430	1255	195	1380	2 x 1.2	840
DS 148	**1220**	**2790**	**2605**	**1650**	**505**	**458**	**1395**	**195**	**1380**	**2 x 1.5**	**1000**
DS 1410	1220	3400	3205	2070	465	458	1345	195	1380	2 x 2.2	1150
DS 1412	**1220**	**4010**	**3815**	**2990**	**380**	**458**	**1345**	**195**	**1380**	**2 x 3.1**	**1300**
DS 1510	1525	3400	3205	2070	465	580	1515	195	1685	2 x 3.1	1400
DS 1512	**1525**	**4000**	**3815**	**2990**	**380**	**580**	**1515**	**130**	**1685**	**2 x 3.7**	**1650**
DS 1514	1525	4610	4425	3600	380	580	1515	195	1685	2 x 3.7	1800
DS 1612	**1830**	**4000**	**3815**	**2990**	**380**	**580**	**1600**	**195**	**1990**	**2 x 4.7**	**2300**
DS 1614	1830	4610	4425	3600	380	580	1600	195	1990	2 x 4.7	2510
DS 1616	**1830**	**5220**	**5035**	**4210**	**380**	**580**	**1700**	**195**	**1990**	**2 x 5.5**	**2990**
DS 1816	2440	5220	5035	4210	380	580	1700	195	2600	2 x 7.0	4100

*Above screen data based on 415 Volt 50 Hz., units available for 460/240/220/110 50/60 Hz service.